

IC5

CEILING LOUDSPEAKERS

In-ceiling / In-wall Loudspeaker



PRODUCT OVERVIEW

With its discreet design, the IC5 2-way loudspeaker is the perfect option for 70/100 V and low impedance sound solutions. It mounts a 5" woofer and a 0,5" tweeter.

IC series provide excellent sound quality thanks to their infinite baffle philosophy and a top-performance high frequency transducer.

KEY FEATURES

- Two-way ABS speaker, 25 WRMS
- 5" woofer / 0,5" tweeter
- Built-in audio transformer for 70/100 V use
- Polypropylene woofer that resists heat and humidity
- Front grill may be removed for painting
- Aluminium front grill, rust-proof
- Clip-type input terminals and low impedance / high impedance power tap selector
- Cutting and painting templates included
- Support system with 3 rotating tabs


APPLICATIONS

- Corporate and residential buildings
- Commercial premises
- Leisure centres
- Sound reinforcement in clubs, bars, etc.
- Health and sports centres
- Meeting and conference rooms
- 5.1 and 7.1 surround systems
- Auditoriums, museums

CERTIFICATIONS

- EN60065:2014
- EN55103-1:2009
- EN55103-2:2009
- 2006/95/EC
- 2004/108/CE

MECHANICAL DIAGRAMS

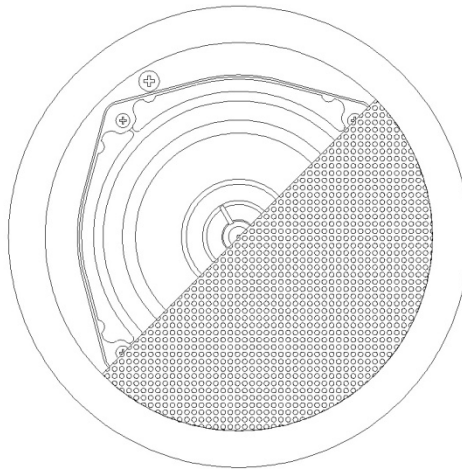

TECHNICAL DATA

Nominal low impedance	8Ω
RMS power	25W
Nominal high impedance	100V Line
Power selector	1.5, 3, 6, 12W
Frequency response (-6dB)	80Hz - 20kHz
Sensitivity 1W/1m	88dB
External diameter	191mm
Internal diameter	166mm
Recommended cut out diameter	168mm
Required depth	70mm
Weight	1,2Kg