Changes for the Better







User-friendly, Viewer-friendly... Teaching Doesn't Get Much Easier

The perfect projector for educational presentations



Advanced Features Make Teaching Easier Than Ever

DIP

10W Speaker + Audio Mix

Excellent Sound Projection

The XD221 $U_{(D)}$'s high-volume 10W speaker eliminates the need for an external speaker. By using the "Audio Mix" feature and a wireless microphone (not included), the presenter's voice is amplified loud and clear every time.



Closed Caption (CC) Capable

Simple and Automatic Subtitles

With the touch of a button, the built-in closed caption decoder transforms words into

subtitles that are then projected onto the screen; a convenient function that addresses the needs of language students and hearingimpaired viewers.



Easy Maintenance and High Value Performance

1. Built-in RJ-45 Port All-in-one Web-based Management of Multiple Projectors When connected to a dedicated LAN, you can view the status of multiple projectors in the same building. Remote operation of power (on/off) switch, source inputs and other functions are all accessible.

2. Top-loading Lamp Simple Lamp Replacement

The projection lamp is installed in the upper section of the chassis. Whether sitting on a shelf or suspended from the ceiling, lamp replacement is simple and easy, and there's never any need to move the projector.



An overall low operating cost is achieved by utilizing DLP's filter-free technology, a long estimated lamp life of 4000 hours, and a low power standby mode of less than 1W. Maintenance frequency and related costs are also reduced.

3D-Ready Technology

Stunning 3D Imagery

Perfect for higher education applications, images are rendered in stunning 3D—adding a new dimension to viewing scientific, architectural, and engineering imagery.

The 3D video content must be in field sequential format, a high end graphic card and special electronic shutter glasses are required.



Environmentally Friendly

In order to lessen our impact on natural resources, Mitsubishi has engineered specific eco-friendly features including:

Low Standby Power When in Standby mode, the XD221U(D) consumes less than 1Watt of power

• Recycled Paper The carton, and all paper materials within are made from recycled paper



Eco-friendly design

The paint-free cabinet design and use of lead-free solder further minimizes impact on the environment






	Brilliant Color™	Enhancer	Mode	Mode
	10W	Dual VGA	Audio	Freeze
	Speaker	Inputs	Mix	Function
	Auto Distinguish Source	Visual PA	Low Standby Power	Top Loading Lamp
	Closed	LAN	Digital	Lamp
	Caption	(RJ-45)	Keystone	Mode
_	Automatic	Automatic	Instant	Ceiling
	Power on	Power off	Shutdown	Mounted

Input and Output Terminals




2 Audio input S-Video/Video 4 Monitor output 6 PC/Component Video input 6 Serial RS-232C LAN (RJ-45)

Dimensions

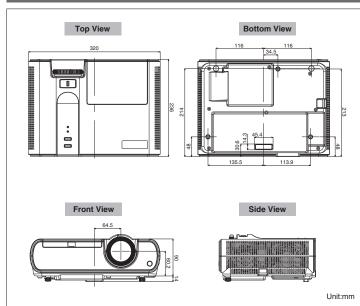

Specifications XD221U(D) Display Technology 0.55" 1-Chip DMD, DDP2230 1024 x 768 (Total 786,432 pixels) [4:3] Brightness 2300lm 2000:1 f=19.9~23.9 mm, F=2.5-2.7 7.9:-1 40" - 300" 1.76 - 2.15 160W (Shut-off Time 5000hr) with Low Mode, 180W (Shut-off Time 3000hr) with Standard Mode Compressed: 1280 x 1024, Minimum: 640 x 480 Native: 1024 x 768, Sync on Green available NTSC / NTSC 4.43 / PAL (including PAL-M, N) / SECAM / PAL-60 Component Video: 480i/p (525i/p), 576i/p (625i/p), 720p (750p), 1080i (1125i 60Hz), 1080i (1125i 50Hz) RGB: mini D-sub 15pin x 2 RCA x 1 + S-VIDEO x 1 Audio: Stereo mini jack (ø3.5mm) x 2 (One for PC, one for video) RGB: mini D-sub 15pin x 1 Audio: Stereo mini jack (ø3.5mm) x 1 (variable) RS-232C: mini DIN 8pin x 1, LAN (RJ-45) x 1 (Projector control) Audio Speaker 10W Mono 12.6" x 4.1" x 9.3" Weight 7.0lbs / 3.2kg AC 100-240V, 50/60Hz Ceiling mount (PROJ-UCM-PRO2), Hard shell case (DKT1-ATAC) VLT-XD221LP 3-Years of Parts/Labor, 3-Years of Express Replacement Assistance (ERA), 1-year or 500 hours lamp warranty (whichever comes first) Compliance with ISO21118-2005 All brand names and product names are trademarks, registered trademarks or trade names of their respective holders.

Screen size and Projection distance

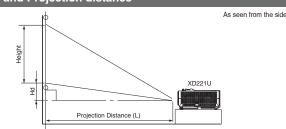

Screen size chart (4:3 aspect ratio)

	Screen						Distance from screen (L)				Height projected	
Dia	Diagonal Size		Width (W)		Height (H)		Max. Zoom		Min. Zoom		image (Hd)	
inc	h	cm	inch	cm	inch	cm	inch	m	inch	m	inch	cm
4	0	102	32	81	24	61	55	1.4	68	1.7	3.6	9
6	D	152	48	122	36	91	84	2.1	103	2.6	5.4	14
8	0	203	64	163	48	122	112	2.8	137	3.5	7.2	18
10	0	254	80	203	60	152	141	3.6	172	4.4	9.0	23
15	0	381	120	305	90	229	212	5.4	259	6.6	13.4	34
20	0	508	160	406	120	305	283	7.2	345	8.8	17.9	45
25	0	635	200	508	150	381	354	9.0	432	11.0	22.4	57
30	0	762	240	610	180	457	425	10.8	-	-	26.9	68

The above numbers are approximate, and may be slightly different from the actual measurements. Screen size chart (16:9 aspect ratio)

Screen size chart (10.9 aspect failo)											
Screen						Distance from screen (L)				Height projected	
Diagonal Size		Width (W) Height		ht (H)	Max. Zoom		Min. Zoom		image (Hd)		
inch	cm	inch	cm	inch	cm	inch	m	inch	m	inch	cm
40	102	35	89	20	50	60	1.5	74	1.9	7.2	18
60	152	52	133	29	75	91	2.3	112	2.8	10.8	27
80	203	70	177	39	100	122	3.1	149	3.8	14.3	36
100	254	87	221	49	125	153	3.9	187	4.8	17.9	46
150	381	131	332	74	187	231	5.9	282	7.2	26.9	68
200	508	174	443	98	249	308	7.8	376	9.6	35.9	91
250	635	218	553	123	311	386	9.8	471	12.0	44.8	114
300	762	261	664	147	374	463	11.8	-	-	53.8	137

The above numbers are approximate, and may be slightly different from the actual measurements.

MITSUBISHI DIGITAL ELECTRONICS AMERICA, INC.

Presentation Products Division Phone: 888.307.0349 www.mitsubishi-presentations.com



PRESENTATION PRODUCTS

MITSUBISHI ELECTRIC SALES CANADA, INC.

Display & Imaging Solutions Division Phone: 905.475.7728 www.mitsubishielectric.ca