



PRODUCT INTRODUCTION
DIGITAL CONFERENCE SYSTEM PRODUCTS

CR-M4101 | Conference System controller

- ◆ Screwed plugs
- ◆ "BASS/TREBLE" adjustment
- ◆ "Apply for speaking" mode



Product Function

CR-M4101 is a multi-function conference controller, can achieve different mold (number of speakers, discussing mold), strong expansion function and perfect audio processing. It has the voting function and data management. Working with CREATOR control system and peripheral, can achieve a high technology conference.

Product features

- 8 pins lockable plug, including interfaces for interpreter unit and expansion controller.
- 12 channels output for interpreter unit.
- The controller can connect 128 conference units at most, and can increase up to 4000 conference units with its expansion function.
- Multi-mode for different conference.
- Powerful expansibility.
- Digital equalizer and noise processor make the sound more clear and intensive.
- 2 audio inputs and 2 audio outputs for peripheral.
- The controller which cooperates with the telephone Coupler can implement distance conference meeting.
- The controller which works with the camera tracking system can achieve camera auto-tracking function.
- 12 channels for interpreting output.
- Voting function, data management function, cooperating with PC management software and central control system etc.
- Input voltage between 100—240V, it can endure 3500V high voltage.
- Pass 3000V high voltage testing.
- Cover with metal material and earth well to ensure the 8000V antistatic .


PARAMETER

Power Supply	AC100-240V 50~60Hz	SNR	(S/N) >80dB
Frequency Response	60-16KHz	Max power	350W
Power consumption	10W	Output Power	≤110W/24V
Audio Out	Power Level 2Vp-p impedance 100R unbalanced	Total Distortion	<0.5%
Distortion	<1%	Crosstalk Attenuation	>50dB
Intercommunication	Din8-PIN×5/RS232 DB9×2/RCA×16/AC Jack		
Size	430L×275W×90H (mm)	Color	grey



PRODUCT INTRODUCTION

DIGITAL CONFERENCE SYSTEM PRODUCTS

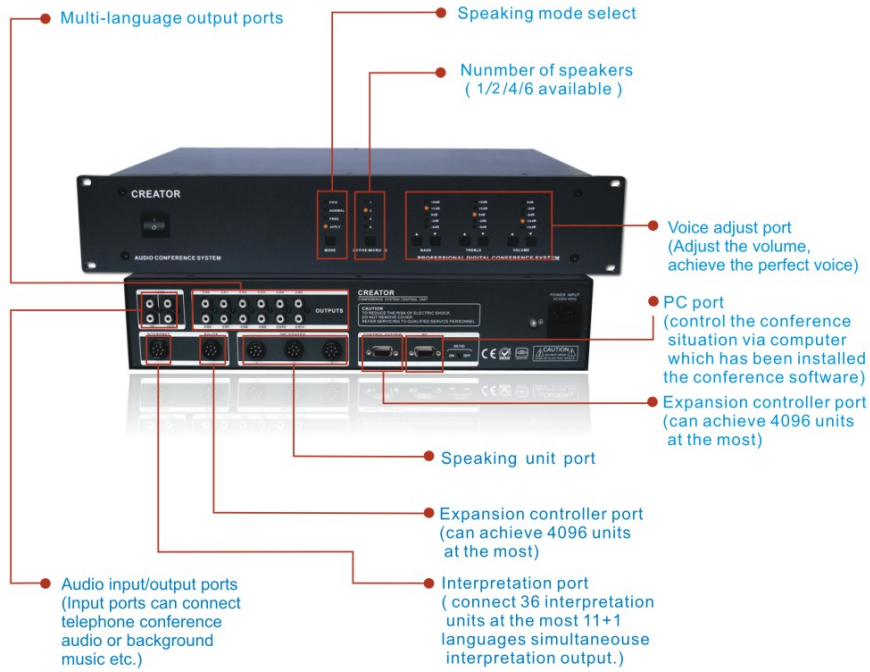

Diagram

